

SCC-C9302(F)

Anti Vandal 3-Axis Day & Night, WDR Dome Camera




- Polycarbonate dome cover that is highly resistant to external shocks and willful acts of vandalism
- Convenient installation, with its 3-axis turning design (Pan: 355°, Tilt: 20° ~ 90°)
- Water resistant and dustproof (IP66)
- 1/4" Ex-View CCD 410K/470K
- Horizontal resolution : 480 TV Lines
- Minimum scene illumination : 0.002(color)/0.0002(B/W) Lux
- 120X Zoom Lens (12X optical, 10X digital)
- 128X WDR (Wide Dynamic Range)
- Day & Night
- Motion Detection (Zones and sensitivity level set by user)
- Alarm Input: 1Ch / Alarm Output: 1Ch
- Privacy Protection Allows up to 8 Privacy Zones
- Remote Control through RS485 and RS422 (using SCC-1000/2000)
- SADT-102WM : Wall-mountable bracket (white) (optional)

Specifications


Model		SCC-C9302(F)	SCC-C9302(F)P	
Imaging Device		1/4" Ex-View CCD		
Effective Pixels		768(H)x494(V)	752(H)x582(V)	
Scanning Method		2:1 Interlace		
Horizontal Resolution		480 TV Lines		
Synchronization Method		Internal/Line lock		
Signal Output		VBS 1.0Vp-p, 74ohm, BNC		
S/N Ratio		52dB		
Minimum Scene Illumination	Color	0.002(Sens up 160X,15IRE)Lux		
	B/W	0.0002(Sens up 160X,15IRE)Lux		
Pan/Tilt	Pan Angle	355°		
	Tilt Angle	20° ~ 90°		
Lens	Zoom Ratio	120X(12X Optical, 10X Digital)		
	Focal Length	3.6 ~ 43.2mm		
	Aperture Ratio	F1.8(Wide), F2.6(Tele)		
	Viewing Angle	Tele	4°7'(H) x 3°6'(V)	
	Wide	52.8°(H) x 40°3'(V)		
Focus		OneAF/Manual		
Functions	Wide Dynamic Range	Off/On(128X)		
	Day & Night	Color/BW/Auto		
	Digital Zoom	Off/On, PIP		
	Motion Detection	Off/On(Area/Sensitivity Setting)		
	Shutter Speed	Off ~ 1/10,000 sec		
	Sens Up	Off/Auto(2X ~ 160X)		
	BLC	Off/On(Area Setting)		
	AGC	Off/On		
	Line lock	Yes		
	Camera ID	Max. 20 Characters		
	White Balance	ATW1/ATW2/AWC/Manual		
	Privacy Zone	Up to 8 zones, set by user		
	Input/Output	Image Output	1 BNC	
		Alarm Input	1 (No, 5mA sink)	
Alarm Output		1 (open collector)		
Remote Control		RS485(Half Duplx)		
Power	Terminal Bolck(2-pin)			
Operating Temperature		-10°C ~ 50°C		
Operating Humidity		Maximum 90% RH		
Power Requirement		AC24V / DC12V compatible		
Power Consumption		6W		
Weight		1,100g(880g)		
Dimensions		150(ø) x 121(D)mm		
Appearance		SCC-C9302 : Ceiling-mountable SCC-C9302F: Embedded into the ceiling		

Dimensions (unit:mm)

SCC-C9302 (for attaching to the ceiling)

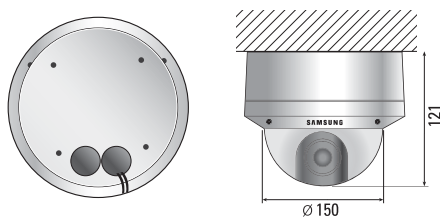

SCC-C9302F (for embedding into the ceiling)

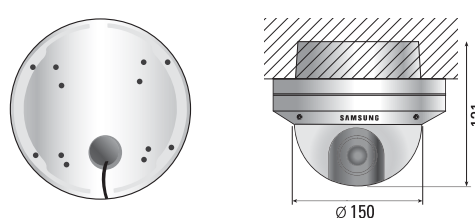

* Design and specifications are subject to change without notice.