

SCC-C6405

220X Power Zoom, Day & Night, WDR Smart Dome Camera





- 22X motorized optical zoom with 10X digital zoom
- High-speed PAN/TILT (400°/sec)
- 1/4" Ex-view HAD CCD 410K/470K
- Horizontal resolution : 480 TV Lines
- DSP (Digital Signal Processor)
- WDR (Wide Dynamic Range)
- Day & Night
- External eynchronization with Line lock
- Motion detection with alarming output
- On-screen menus (multi-language)
- Innotor BLDC motor
- Minimum scene illumination : 0.002(color)/0.0002(B/W) Lux
- 4 alarm inputs, 3 alarm outputs
- Privacy zone

Specifications

Model		SCC-C6405	
Imaging Device		1/4" Ex -View HAD CCD	
Effective Pixels		768(H) x 494(V)	
Scanning Method		Interlace	
Synchronization Method		Internal/Line lock	
Horizontal Resolution		480 TV Lines	
Signal Output		VBS 1.0Vp-p	
S/N Ratio		50dB	
Minimum Scene Illumination	Color	0.002(Sens up 160X,15IRE)Lux	
	B/W	0.0002(Sens up 160X,15IRE)Lux	
Pan/Tilt	Manual Pan/Tilt Speed	Pan : 0.1°/sec~180°/sec(64Step) / Tilt : 0.1°/sec~90°/sec(64Step)	
	Preset Pan/Tilt Speed	Pan : 400°/sec(max) / Tilt : 200°/sec(max)	
	Panning Range	360°/sec(Endless)	
	Tilt Range	0° ~ 180°	
	Number of Auto Pan	4	
	Number of Preset	128	
	Number of Pattern	3	
Lens	Zoom Ratio	22X	
	Focal Length	3.6 ~ 79.2mm	
	Aperture Ratio	F1.6(Wide), F3.8(Tele)	
	Viewing Angle	Tele : 2°3'(H) x 1°7'(V) Wide : 47°9'(H) x 36°9'(V)	
Functions	Day & Night	Color/BW/Auto	
	High Speed Shutter	Off ~ 1/10Ksec	
	Sens Up	Off ~ 160X	
	BLC	Off/On	
	AGC	Off/Low/High	
	Line lock	On/Off	
	Camera ID	Off/On	
	White Balance	ATW1/ATW2/AWC/Manual	
	Input/Output	Alarm Input	4
		Alarm Output	3
Remote Control		RS485	
Operating Temperature	-10°C ~ +50°C		
Power Requirement	AC24V		
Power Consumption	18W		
Weight	1.7kg		
Dimensions	159.5(ø) x 177(D)mm		

Dimensions (unit:mm)

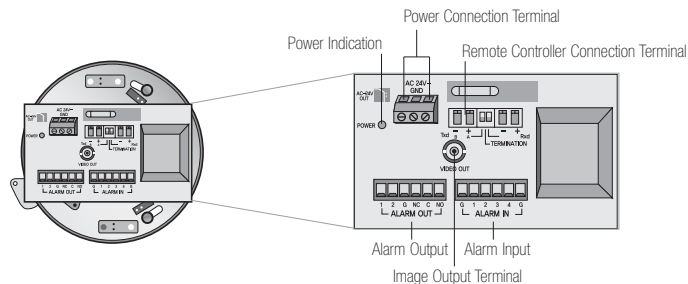

• Design and specifications are subject to change without notice.



SAMSUNG ELECTRONICS CO., LTD.

Digital AV Division
VSS marketing, 416, Maetan 3 Dong, YeongTong-Gu, Suwon City, Kyeonggi-Do, Korea, 443-742
Tel: +82-31-277-3342-3347 Fax: +82-31-277-6597 www.samsungsecurity.com